

...for Examination and Treatment / Folding-Wall-Tables

Please choose - without surcharge – between 2 different variants of leatherettes:
- Stamskin®Top (34 colours) or - Skai® Pandora Plus (20 colours)



Model 125-01/L

Model 125-01/L = head part on left side (picture)

Model 125-01/R = head part on right side

Underpart of square tube 30x30x2 mm, chromed.

In functional state the table stands on the feet.

In this way the table has a high rugged design (minimum application of load to the wall).

Only if the table is turned up- or downwards the wall holders will be burdened (carrying function).

Note: The mounting of Mod. 125 with standard wall holders is only allowed at a solid wall.

For other wall constructions you need special designed wall holders (Mod. 125-1380) with an additional stabilization at the floor.

(Only possible if there is no baseboard at the place where you want to install the table)

Basic equipment of Mod. 125:

Lying surface 2-sectioned:

- Head part upwards adjustable (+30°) by 2 metal rachets,

safety and for longevity. Length of head part: 550 mm

- Foot part fixed, Length: 1.400 mm.

- Turnable to the wall over alongside of the table upwards (picture 2) or downwards (picture 3)

- Swinging out of the feet by pneumatic spring support

- The pneumatic springs are also a safety mechanism against unintentional folding of the feet in functional state of the table

- With 2 wall holders for table fixation

- With 1 safety holder including belt (for safety fixation of the upwards turned table)

- 1 spacer as a swinging stop if the table is vertical turned downwards

Standard-Thickness of upholstery: 8 cm

Measures: L: 1.950 mm, W: 650 mm, H: 700 mm

Weight of the table: 35 kg


Load capacity: 200 kg (max. weight of patient), only for solid walls.

Other wall constructions may reduce the load capacity.

Important measures for mounting of the table:


- Length: Table including wall holders: 2.040 mm

Picture 2

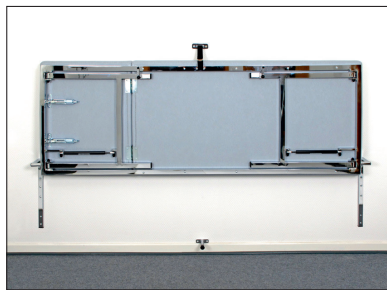

- Distance from the wall table turned upwards: 150 mm

Picture 3

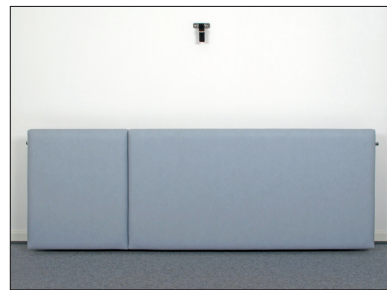

- Distance from the wall table turned downwards: 200 mm



Model 126-01

Model 126-01

Underpart of square tube 30x30x2 mm, chromed. In functional state the table stands on the feet. In this way the table has a high rugged design (no application of load to the wall).

Turned upwards to the wall the table stands on the behind foot-rack. Then it is the bearing element. The foot-rack has to be fixed by screws, additional at wall and floor.

Note: The mounting of Mod. 126-01 must be at a load-bearing, solid wall.

Basic equipment of Mod. 126-01:

Lying surface 2-sectioned:

- Head part upwards adjustable (+30°) by 2 metal rachets,

safety and for longevity. Length of head part: 550 mm

- Foot part fixed. Length: 1.400 mm.

- Turnable to the wall transverse over end of head part

(The turning out of the feet of foot part and the swinging downwards of complete table is manual.

Fixation of the turned out feet by knurled screw)

- With 2 wall holders including safety belt (for fixation of the upwards turned table)

Standard-Thickness of upholstery: 8 cm

Load capacity: 200 kg (max. weight of patient), only for solid walls.

Measures: L: 1.950 mm, W: 650 mm, H: 650 mm,

Weight of the table: 34 kg

Important measures for mounting of the table:

- Necessary height of room: 2.420 mm

- Length of operability table: 2.050 mm

(measured including the behind foot-rack)

- Distance upholstery head part to the wall: 90 mm

- Place of the 2 wall holders approx. : H: 1.430 mm



All Dewert-Tables are manufactured by ourselves in Bielefeld, Germany. If possible, the tables may be delivered in special measures or with additional functions for your special applications. Please do not hesitate to contact us.